


TECHNICAL DATA SHEET

DAC-Anode® WB & Overcoat – For Reinforced Concrete Cathodic Protection

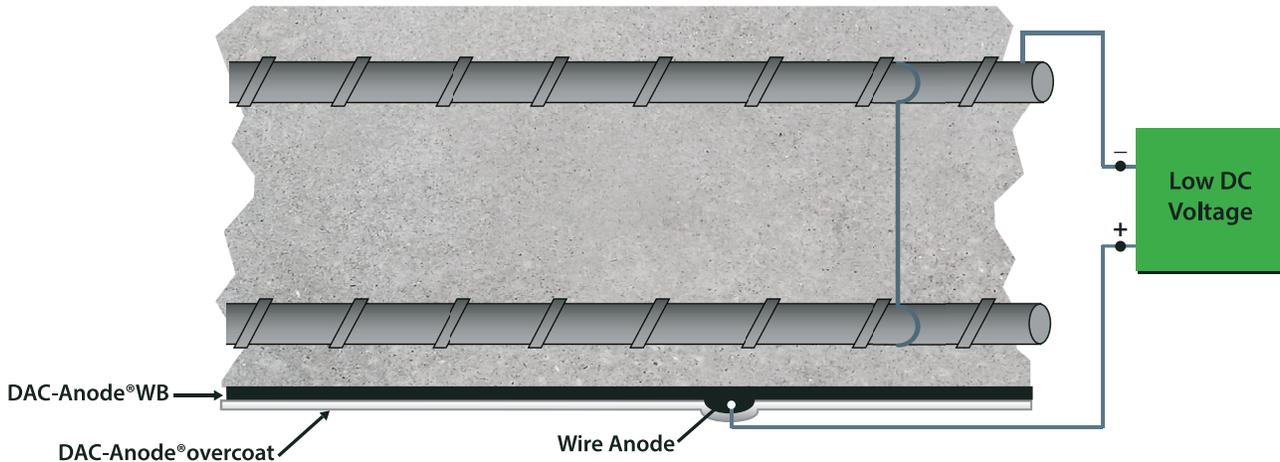

Inevitable

Aging concrete infrastructure and its degradation, is unfortunately accepted as inevitable across the modern world. Spalling and cracking of the concrete surface due to corrosion is common and while the financial impact of repairs is indeed staggering, the devastating societal impact of a failure should be foremost in the minds of owners and operators.

Conventional repair techniques address only the symptoms of the problem (spalling and cracking), not the root cause (corrosion). This results in a spiraling repair/degradation cycle and when the root cause is finally addressed, conventional corrosion prevention systems prove to be costly and destructive to implement.

Proven

DAC-Anode® is the original non-destructive corrosion prevention solution for steel reinforced concrete. DAC-Anode® has decades of proven service throughout the world and provides existing structures with a new lease on life, at minimal cost to owners and operators. DAC-Anode® forms the anode component of a cathodic protection system, which is designed to distribute corrosion halting current to steel reinforcement. However, DAC-Anode® is unique because it comes as a single component coating rather than an expensive alloy mesh. This means that DAC-Anode® can be applied to the surface of the concrete, rather than needing to be embedded like legacy anode systems, saving time and money while still providing the same level of protection.

Features & Benefits

- Can be applied to new or rehabilitated surfaces.
- Minimal installation costs and zero structural risk due to a non-destructive installation technique.
- Environmentally friendly, single component water-based acrylic copolymer achieves recommended thickness in a single coat.
- Can be top coated in an array of colors with DAC-Anode® Overcoat which is flexible, crack resistant and weather resistant.

DAC-Anode is distributed under licence by Vector Corrosion Technologies on behalf of **Corrosion Service Company Limited** www.corrosionservice.com



To the best of our knowledge, the data contained herein are true and accurate at the date of issuance and are subject to change without prior notice. User must contact supplier to verify correctness before specifying or ordering. No guarantee of accuracy is given or implied. We assume no responsibility for performance or injuries resulting from use. Liability, if any, is limited to replacement of products. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY THE SELLER, EXPRESS OR IMPLIED, STATUTORY, BY OPERATION OF LAW, OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

TECHNICAL DATA SHEET
DAC-Anode® WB – For Reinforced Concrete Cathodic Protection

Technical Data	
Generic Type	Single component water-based acrylic copolymer
Color	Black
Solids by Volume	40% ± 2%
Solids by Weight	54% ± 2%
V.O.C.	103 grams/liter (0.86 lbs./gal.)
Mixing Ratio	Not applicable
Induction Time	Not applicable
Thinner	Not recommended
Clean Up	Water
Pot Life	Not applicable
Suggested Primer	Not applicable
Application Method	Brush, roller and spray
Recommended Thickness <i>With primary anode wire (platinum clad) at 10 mA/m² (0.93 mA/ft²) anode output and wire/wire spacing of:</i>	5m (16.4 ft) max: 750 microns wet – 300 microns DFT (30 mils wet – 12 mils DFT) 2.5m (8.2 ft) max: 500 microns wet – 200 microns DFT (20 mils wet – 8 mils DFT)
Theoretical Coverage	1.3 m ² /liter @ 300 microns DFT (52.9 ft ² /gal. @ 12 mils DFT)
Coverage (5% Loss)	1.2 m ² /liter @ 300 microns DFT (48.9 ft ² /gal. @ 12 mils DFT)
Drying Time @ 21°C (70°F)	Dry hard: 3 – 4 Hours / Recoat: 4 – 6 Hours
Specific Resistivity	< 0.8 OHM cm (hard)
Linear Resistance	<300 OHM: 7.6 cm x 1.8 m x 400 microns DFT (3 in x 5.9 ft x 16 mils DFT) <400 OHM: 7.6 cm x 1.8 m x 300 microns DFT (3 in x 5.9 ft x 16 mils DFT)
Packaging	3.78 & 18.9 liters (1 & 5 US gallons)
Shelf Life	Six (6) months in original unopened container

Product Description

DAC-Anode® WB is a single package, electrically conductive coating for application on properly prepared reinforced steel concrete structures. Intended for use as an impressed current cathodic protection system anode, DAC-Anode® is designed to distribute direct current to embedded reinforcing steel. Electrical connection to the DAC-Anode® WB coating is accomplished by means of small tri-metal platinum-clad wires embedded into the coating.

Recommended Uses

Conductive coatings are ideal for cathodic protection of reinforcing steel in balconies, walkways, columns, suspended slabs, under decking, piers, piles, pile caps, sea walls, railings, bulk-heads, etc.

Characteristics

- Low V.O.C water-based materials.
- One component material.
- Recommended DFT achievable in one coat.
- Easy to apply.
- Can be top coated with DAC-Anode® Overcoat, available in an array of colors to yield an aesthetically pleasing appearance.

DAC-Anode is distributed under licence by Vector Corrosion Technologies on behalf of **Corrosion Service Company Limited** www.corrosionservice.com



To the best of our knowledge, the data contained herein are true and accurate at the date of issuance and are subject to change without prior notice. User must contact supplier to verify correctness before specifying or ordering. No guarantee of accuracy is given or implied. We assume no responsibility for performance or injuries resulting from use. Liability, if any, is limited to replacement of products. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY THE SELLER, EXPRESS OR IMPLIED, STATUTORY, BY OPERATION OF LAW, OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

TECHNICAL DATA SHEET
DAC-Anode® Overcoat – For Reinforced Concrete Cathodic Protection

Properties	Test Methods	Results
Water Vapor Transmission	CGSB 9-GP-2	43.1 PERMS
Light Resistance (100 hours)	CGSB 1-GP-71 (120.1) or ASTM E-188	Unaffected
Impact Resistance (on concrete backing)	CGSB 1-GP-71 (147.1)	90 in•lb
Salt-Fog Resistance (500 hours)	ASTM B-117-62	Unaffected
Freeze-Thaw Resistance	20 cycles of room temperature in water to -12°C (10°F)	No cracking, checking or chipping under 10x magnification
Accelerated Weathering (5,500 hours)	CGSB 1-GP-71 (122.2)	No cracking or chipping under 10x magnification
Fire Resistance	CGSB 1-GP-71 (118.4)	No smoke, flame or afterglow. Destruction of coating confined to flame impact area

Technical Data	
Generic Type	Acrylic emulsion
Color	White (Other colors available on request)
Solids by Volume	47% ± 2%
V.O.C.	150 grams/liter (1.25 lbs./gal.)
Mixing Ratio	Not applicable
Thinner	Not recommended
Clean Up	Hot Water
Pot Life	Not applicable
Application Method	Roller or spray
Number of Coats	1 or 2, depending on substrate
Recommended Thickness	87 – 175 microns (3.5 – 7 mils) DFT depending substrate porosity
Theoretical Coverage	5.3 m ² /liter @ 87.5 microns DFT/coat (215.9 ft ² /gal. @ 3.5 mils DFT) 2.65 m ² /liter @ 175 microns DFT (107.9 ft ² /gal. @ 7 mils DFT)
Drying Time @ 21°C (70°F)	Tack free: 2 hours Full cure: 4 – 7 days
Packaging	3.78 & 18.9 liters (1 & 5 US gallons)
Shelf Life	One (1) year in original unopened container

Description

DAC-Anode® Overcoat is a single component, acrylic emulsion, water-based finish coat for use as a topcoat over DAC-Anode® WB Conductive Coating. Easy to apply and cleans up with soap and water. Dries quickly to a matt finish, has excellent flexibility and maintains color when exposed to normal weathering and mild industrial environments. Easily recoated after extended periods.

Characteristics

- Low V.O.C water-based materials.
- One component material.
- Available in a variety of colors.
- Excellent adhesion to damp surfaces.
- Flexible and crack resistant.
- Thicker than conventional paint.