


## LIDA® NET Mesh Anodes



Viaduct



Guard Rail Sidewalk Detail

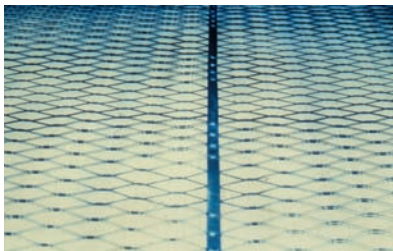

LIDA® NET

**LIDA® NET Anode** - is the leading mixed metal oxide anode technology. Reliability is proven with over 110,000 square meters of installed anode surface area in more than 30 countries.

### ADVANTAGES:

- **Even current distribution** the highly expanded mesh pattern provides uniform cathodic protection current to the rebars
- **Pre-fabricated** the LIDA® NET Anode arrives at the job site ready to be rolled out, fastened down and connected
- **Quick all weather installation** no need to wait for curing, mixing of chemicals, cutting of slots or spraying of paints; there are no electrical splices in the concrete
- **Activation coating** mixed metal oxide coating; the LIDA® NET produces mainly oxygen
- **Quality control** LIDA® NET Anode is manufactured under strict quality control procedures, quality control certificates are provided on request

### TYPICAL INSTALLATIONS

#### Material Specifications

Technical data	Unit	LIDA®CN15	LIDA®CN25	LIDA®CN35
Maximum rated current output per unit of concrete surface	mA/m <sup>2</sup>	20	30	40
FHWA maximum anode current density (*)	mA/m <sup>2</sup>	110	110	110
Expected design life	Years	100	100	100
<b>Substrate composition</b>		<b>ASTM B 265 Titanium grade 1</b>		
<b>Catalyst</b>		<b>Mixed Metal Oxide for Oxygen Evolution</b>		
Nominal diamond dimensions	mm	85 x 38	62 x 22	40 x 19
Nominal thickness (Approx)	mm	1.8	1.8	2
Lengthwise Electrical Resistance (1.2 m wide strip )	Ohm/m	0.080	0.070	0.039
<b>Widthwise Electrical Resistance</b>				
With current distributor type 1	Ohm/m	0.013	0.011	0.009
With current distributor type 2	Ohm/m	0.017	0.013	0.011
<b>NET roll nominal dimensions</b>				
Width	m	1.2	1.2	1.2
Length	m	50	50	50
Weight per roll (Approx)	Kg	10	13	16
Weight/m <sup>2</sup> of NET (Approx)	Kg/m <sup>2</sup>	0.16	0.22	0.27
<b>Current distributor</b>		<b>Dimensions</b>	<b>Electrical resistance</b>	
Type 1	15 mm (width) x 1 mm (thickness)		0.037 Ohm/m	
Type 2	10 mm (width) x 0.5 mm (thickness)		0.11 Ohm/m	

\*Anode current density may be increased to 220 mA/m<sup>2</sup>. In the short term, during initial polarization, the anode current density may be increased to 400 mA/m<sup>2</sup>.



[www.denora.com](http://www.denora.com)

Durantes Vincunt

Industrie De Nora S.p.A. - Via Bistolfi, 35 - 20134 Milan, Italy - ph +39 02 21291 - fax +39 02 2129 2363 - mail [info.products@denora.com](mailto:info.products@denora.com)

All information, recommendations and suggestions appearing herein concerning the use of our products are based upon tests and data believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of the products described herein. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by De Nora as to the effects of such use or the results to be obtained, nor does De Nora assume any liability arising out of the use by others of the products referred to herein. In addition, the information herein is not to be construed as absolutely complete since additional information may be necessary or desirable when particular circumstances exist or because of applicable laws or government regulations. Nothing herein contained is to be construed as a recommendation to infringe any patent.